




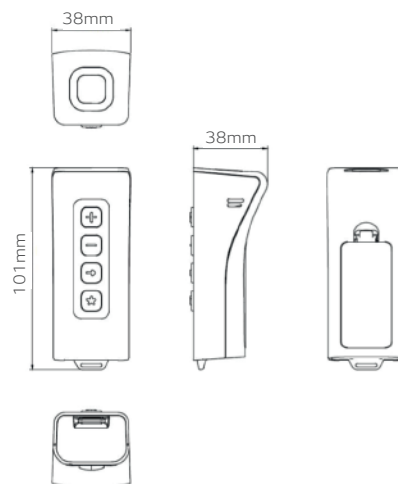
Electronic Shelf Labelling solution provides easily expandable environment to retail market



SPECIFICATIONS

Model ESL Tag Controller		REAX-XOXXA
Size		37.5 x 101.7 x 39.5 (mm)
Weight		80.2g±20% (Include Battery -Battery 22.8g)
Power		Rate : 3 V / 150 mA AAA Alkaline Battery × 2EA (Removable)
Operating Environment		MCU : 16bit RISC Memory : Flash 2KB, 4-Button Input 1-LED Indicator Piezzo Buzzer
Network	HF	13.56MHz Transmitter
	Protocol	Compatible with LGIT protocol communication device
	Comm. Range	Typ. 10mm
Operating Environment Temperature		Min. 0°C; Typ. 25°C; Max. 40°C
Certificate of Compliance		RoHS  CE2200

TECNICAL DRAWINGS



FEATURES:

- To connect the tag to ESL Gateway
- To disconnect the tag from ESL Gateway
- Change to the stored next image
- Manually Wake up tag from sleep mode